

# KOBAN

## FEATURES

- ✓ Simple and integrative structure design, easy in installation.
- ✓ Housing with high heating conductive plastic and aluminum material, excellent heating radiation performance.
- ✓ High luminous efficacy, small lumen depreciation, long lifespan




## TECHNICAL SPECIFICATIONS

	LED-6060-48W Code: 8767919/8767920	LED-30120-48W Code: 8767921/8767922
LED light source	SMD2835	
Input voltage	100-240 V AC	
Lm/W	>70	
Lumen	3360±10%	3360±10%
CRI	Ra>70	
Color temp.	4000K/6500K	
Power	48W	
Lifetime	50000hr	
Total harmonic distortion	<10%	
Work humidity	20-80%RH	
IP Rating	IP20	


	LED-6060-48W	LED-30120-48W
Power factor	>0.9	
Beam angle	120°	
Material	Aluminum	
Size(mm)	595*595*9	295*1195*9

## DIMENSIONS

LED-6060-48W

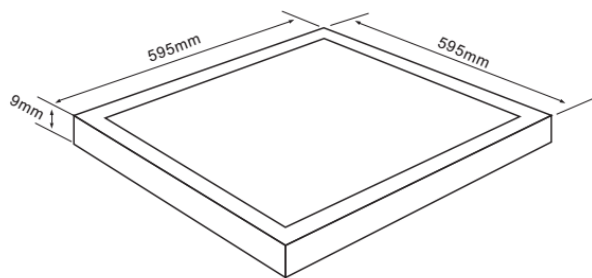


LED-30120-48W

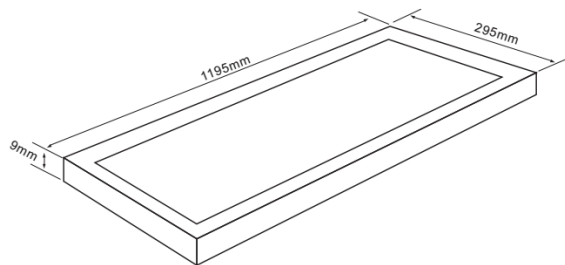


## GAMMA ANGLE

LED-6060-48W

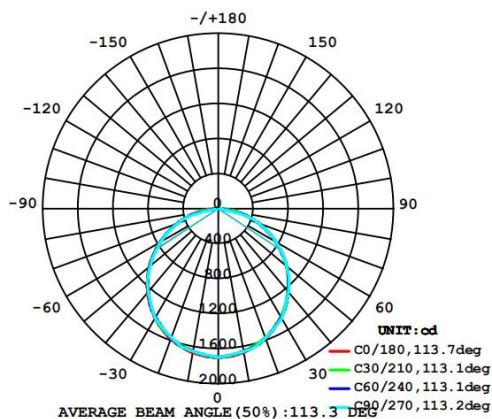

LED-30120-48W

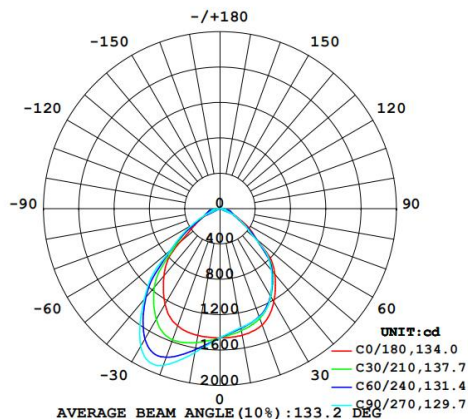



**FEATURES**

- ✓ Simple and integrative structure design, easy in installation.



**TECHNICAL SPECIFICATIONS**

	KFR-LED-6060 Codes 8767962	KFR-LED-30120 Codes 8767963
Material	aluminum	aluminum
Size(mm)	600*600*42	300*1200*42

# KOBAN



## FEATURES

- ✓ Simple and integrative structure design, easy in installation.
- ✓ Housing with high heating conductive aluminum material, excellent heating radiation performance.
- ✓ High luminous efficacy, small lumen depreciation, long lifespan




## TECHNICAL SPECIFICATIONS

	KLED-FR6060-40W Codes 8768013
LED light source	SMD2835
Input voltage	220-240 V AC
Lm/W	>80
Lumen	3200±10%
Power	40W
CRI	Ra>80
Color temp.	6500K
Lifetime	50000hr
Total harmonic distortion	<10%
Work humidity	20-80%RH
IP Rating	IP20

	KLED-FR6060-40W
Power factor	>0.9
Beam angle	120°
Material	aluminium
Size(mm)	595*595*12mm

## DIMENSIONS

KLED-FR6060-40W

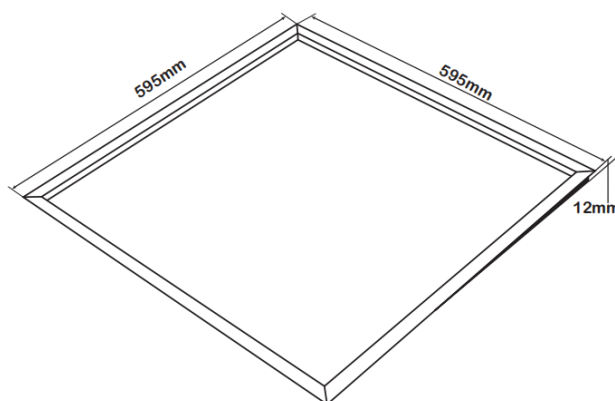

## GAMMA ANGLE