

# KOBAN

## FEATURES



- ✓ Simple and integrative structure design, easy in installation.
- ✓ Housing with high heating conductive aluminum material, excellent heating radiation performance.
- ✓ High luminous efficacy, small lumen depreciation, long lifespan




## TECHNICAL SPECIFICATIONS

	KLED-FLS-50W-S 8768006	KLED-FLS-100W-S 8768007
LED light source	SMD5730	SMD5730
Solar panel	polysilicon	polysilicon
Lm/W	>100	>100
Lithium battery	3.7 V/10AH	6.4 V/10AH
Discharging time	10-12hours	10-12hours
Power	50W	100W
CRI	Ra>70	Ra>70
Color temp.	6500K	6500K
Lifetime	50000hr	50000hr
Total harmonic distortion	<10%	<10%
Work humidity	20-80%RH	20-80%RH
IP Rating	IP65	IP65

	KLED-FLS-50W-S 8768006	KLED-FLS-100W-S 8768007
Power factor	>0.9	>0.9
Beam angle	120°	120°
Material	Aluminum	Aluminum
Size(mm)	270*55*210mm	300*65*240mm

### DIMENSIONS

KLED-FL-S-50W

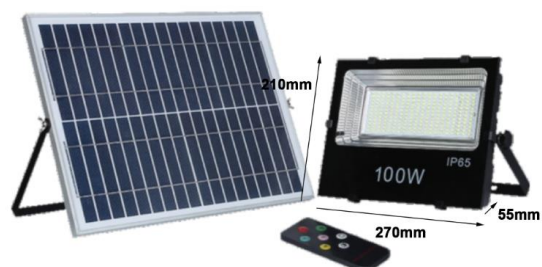

KLED-FL-S100W

