

# KOBAN



## FEATURES

- ✓ Simple and integrative structure design, easy in installation.
- ✓ Housing with high heating conductive plastic and aluminum material, excellent heating radiation performance.
- ✓ High luminous efficacy, small lumen depreciation, long lifespan




## TECHNICAL SPECIFICATIONS

Code: 8767913 / 8767914	LED-G4-105
LED light source	SMD2835
Input voltage	12 V AC/DC
Lm/W	>100
Power	2,7W
Base	G4
Lumen	270±10%
CRI	Ra>80
Color temp.	3000K/6500K
Lifetime	50000hr
Total harmonic distortion	<10%
Work humidity	20-80%RH
IP Rating	IP20

	LED-G4-105
Power factor	>0.5
Beam angle	360°
Material	PC
Size(mm)	Φ15x44

## DIMENSIONS

LED-G4-105

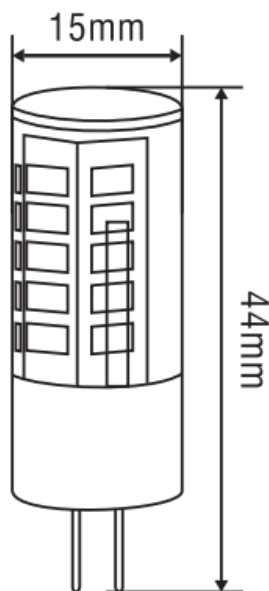

# KOBAN



## FEATURES

- ✓ Simple and integrative structure design, easy in installation.
- ✓ Housing with glass cover, excellent heating radiation performance.
- ✓ High luminous efficacy, small lumen depreciation, long lifespan.




## TECHNICAL SPECIFICATIONS

Code: 8767915 / 8767916	LED-G9-104
LED light source	SMD2835
Input voltage	220-240 V AC
Lm/W	>85
Lumen	220±10%
Power	2,5W
CRI	Ra>80
Base	G9
Color temp.	3000K/6500K
Lifetime	50000hr
Total harmonic distortion	<10%
Work humidity	20-80%RH
IP Rating	IP20

	LED-G9-104
Power factor	>0.5
Beam angle	360°
Material	Silicon
Size(mm)	Φ15x46

## DIMENSIONS

LED-G9-104

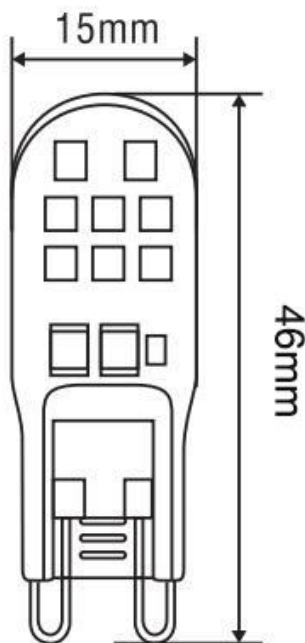

# KOBAN

## FEATURES

- ✓ Simple and integrative structure design, easy in installation.
- ✓ Housing with glass cover, excellent heating radiation performance.
- ✓ High luminous efficacy, small lumen depreciation, long lifespan.



## TECHNICAL SPECIFICATIONS

Code: 8767917 / 8767918	LED-E14-101
LED light source	SMD2835
Input voltage	220-240 V AC
Lm/W	>90
Lumen	300±10%
Power	3.3W
Base	E14
CRI	Ra>80
Color temp.	3000K/65000K
Lifetime	50000hr
Total harmonic distortion	<10%
Work humidity	20-80%RH
IP Rating	IP20

	LED-E14-101
Power factor	>0.5
Beam angle	360°
Material	PC
Size(mm)	Φ16x54

## DIMENSIONS

LED-E14-101

